



Accu II High Speed

Accessories

Equipment

D&K's automatic cutter features perfect precision flush cutting within $\pm .010$ of an inch. With technologically advanced servo motor, the Accu II High Speed features more accuracy and less maintenance. In addition, the Accu II High Speed comes with its own stand.

Accuracy

Flush cutting accuracy within $\pm .010$.

Speed

Automatic or operator controlled.

Cutter Control

Closed loop servo-driven pull rollers.

Operator Interface

Easy to read 4x20 LCD display with 16-button keypad. Sheet size entered in inches or millimeters.

Modes


Flush cut, front/rear sealed edge, cut-to-length, batch & sheeter modes.

Infeed

Easily adjustable side guides.

Delivery

Heavy duty built-on power exit table.

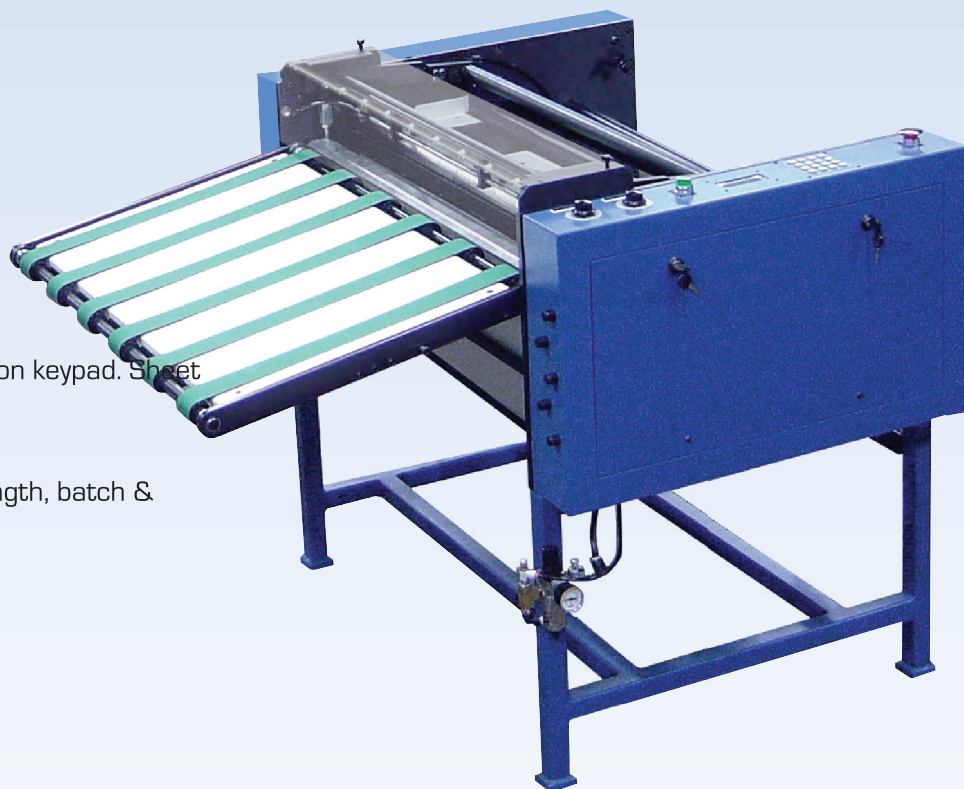

Very simply, the D&K Accu II High Speed guillotine cutter will change the way you cut your laminated materials.

Specifications

Dimensions:	51"W x 52"L x 44"H
Weight:	350 lbs. (approx.)
Electric:	115V line cord, 10 amps
Air Requirements:	4 cfm @ 80 psi
Throughput:	Max. 125 fpm; varies with sheet size.
Max. Web Width:	32"
Max Material Thickness:	30 mils

The above information is presented for reference and illustration of general product characteristics only. The information does not constitute a representation or warranty relating to the suitability or fitness for a particular application or otherwise create guarantees of product performance. All material should be tested by purchaser to determine final suitability.

Made in the USA

