





Double Kote Jr. NT System

Narrow Format Equipment

Keeping with our reputation as the most cost effective manufacturer of durable, proven, mid-size equipment in the marketplace, our Double Kote Jr. NT is equipped to run polyester and polypropylene with equal ease. The Double Kote Jr.'s NT roller allows for maintenance-free operation on an extremely durable and reliable machine. Increase profits and decrease your costs with the Double Kote Jr. NT.

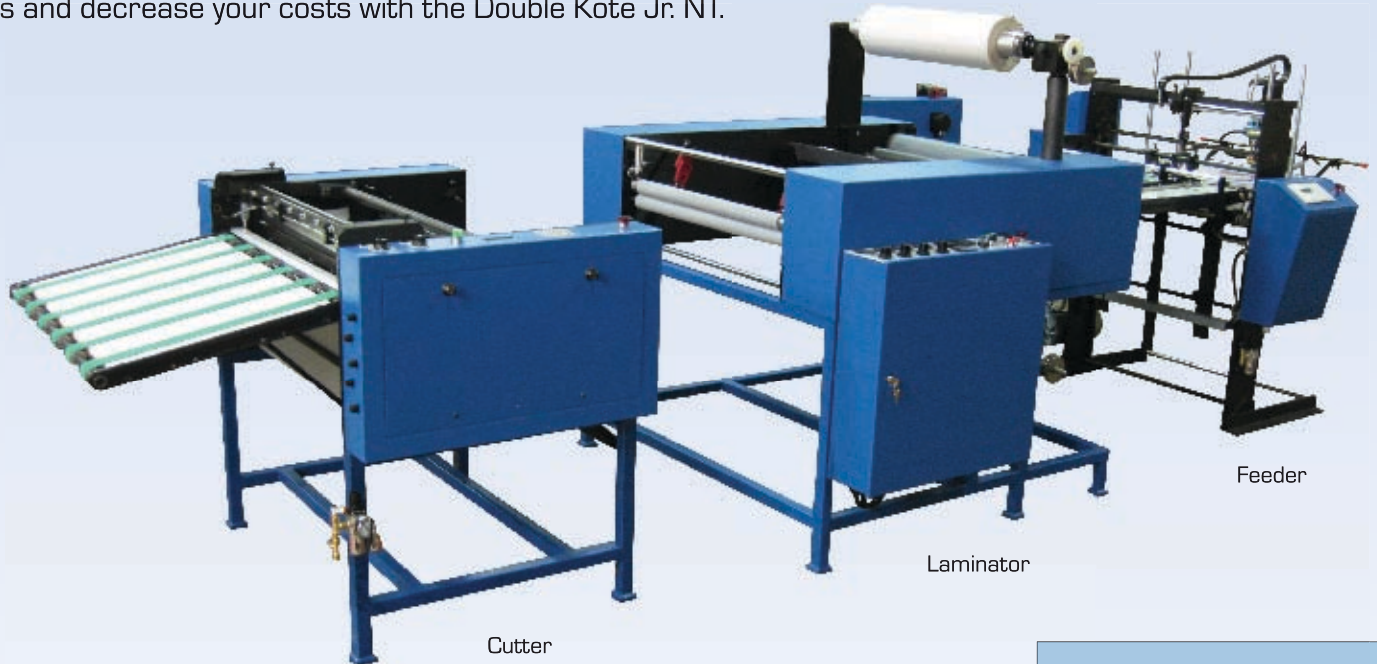

- ❑ Available in full system or purchase each component as your business grows.
- ❑ Versatile laminating width of 26".
- ❑ Sheet feeder available in 27"x30" or 27"x40".
- ❑ Swing out mandrels and touch pad controls for quick change overs and precision adjustments.
- ❑ Full system needs only one operator, saving labor.
- ❑ Revolutionary NT roller holds temperature to +/- 3 degrees Fahrenheit throughout operation.
- ❑ Uses fans for rapid web cooling and an Accu II HS cutter for sealed edge or flush cutting.
- ❑ Ability to run 10 mil films at up to 25 fpm.

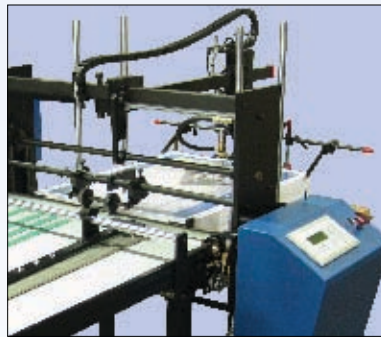


The above information is presented for reference and illustration of general product characteristics only. The information does not constitute a representation or warranty relating to the suitability or fitness for a particular application or otherwise create guarantees of product performance. All material should be tested by purchaser to determine final suitability.



Technical Specifications

Dimensions:	5'W x 19.75"L x 5'H
Electrical:	220V single phase 50 amp (w/ neutral)
Air:	8 cfm @ 80 psi
Warmup Time:	20 Minutes
Speed:	1.5 mil - 50 fpm 3 mil - 40 fpm 5 mil - 30 fpm 7 mil & 10 mil - 25 fpm
Min. Sheet Size:	8 1/2" x 11"
Max Sheet Size:	26" x 40"
Min Sheet Thickness:	80 lb. Text
Max Sheet Thickness:	20 pt. Board

Foot Print

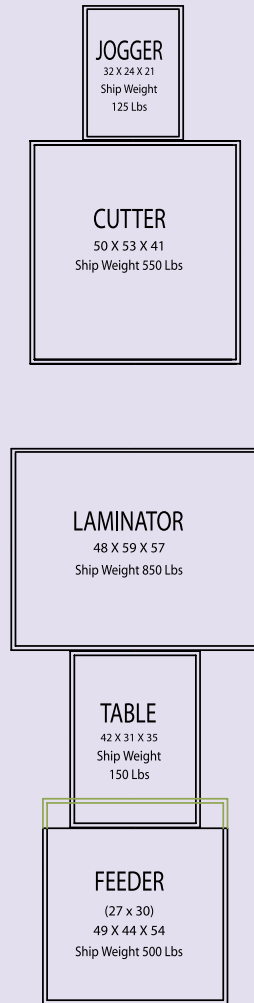

Feeder

The new feeder for the Double Kote Jr. System is equipped to handle a wide range of stocks, giving you more flexibility. To keep up with the demand of shorter run digital printing, we have redesigned the feeder to be more accessible for the operator and feed down to the very last sheet. This state-of-the-art feeder also registers the sheet, ensuring consistent gap and making the laminating process more accurate from start to finish.

Laminator

The Double Kote Jr. NT laminator is one that stands alone. Whether you are just starting in two-sided finishing or a seasoned veteran, this laminator will handle your job. The Double Kote Jr. features heated NT and nip rollers that maintain the temperature throughout the run to help maximize your production speed. The system also comes equipped with swing-out mandrels.

Separator

Accu II HS cutter features flush cutting up to +/- .010 of an inch. With a servo-motor, the Accu II features more accuracy and less maintenance. Guillotine-style cutter with modes that include flush cut, front/rear-sealed edge, cut to length, batch and sheeter.