



The System 2760 is ideal for any organization that wants to bring high-quality finishing in-house. The System 2760 is comprised of an automatic feeder, one-sided thermal/PSA laminator, an automatic sheet separator and jogger. The System is designed for today's high demand, short-run finishing jobs, including pressure sensitive applications such as decals, label stock, floor graphics, countertop graphics, and much more.

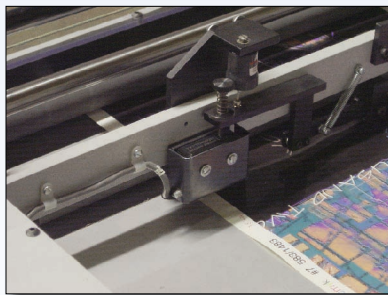

Separator

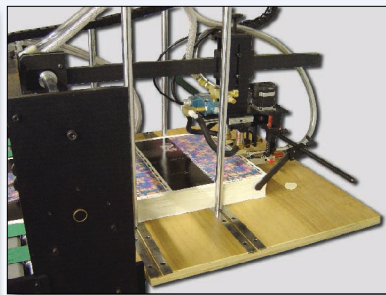

Feeder



Embossing Roller (option)  
Swing Out Mandrel



Touch Screen  
Controls

- Designed for today's on demand digital print, short run jobs, and only requires one operator.
- Can handle sheets from 8 1/2" x 11" up to 26" wide by 30" long at speeds up to 60 fpm.
- Curl management system places film on the paper in a relaxed manner for a flat finished product.
- Features touch pad controls and a swing out mandrel for quick film changeovers.
- System 2760 offers a quick changeover embossing roller as an option.
- Easy feed loader allows load access from the top, side or back of the feeder, making job change overs a snap.
- Pressure sensitive release liner rewind option for processing PSA (cold) films at a high speed.





## Technical Specifications

Dimensions:	5'W x 14½'L x 5'H
Electrical:	220 Volt 30 amp single phase
Air:	6 cfm
Warmup Time:	20 Minutes
Temp. Range:	180°F - 300°F
Speed:	Up to 60 fpm
Min. Sheet Size:	8 ½" x 11"
Max Sheet Size:	26" x 30"
Min Sheet Thickness:	80 lb. Text
Max Sheet Thickness:	18 pt. Board

## Available Options

Embossed Roller

## Foot Print

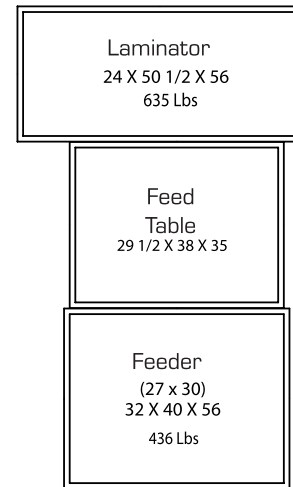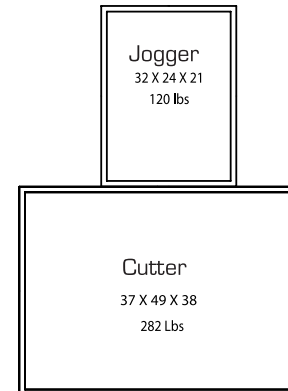

## Feeder

The System 2760 is equipped to handle a wide range of stocks, giving you more flexibility. This state of the art feeder also aligns the sheet, ensuring consistent underlap and making the laminating process more accurate from start to finish.

## Laminator

The laminator provides accurate heat and nip pressure controls, perfect for even the toughest offset and digital prints. A pressure sensitive film release liner rewind provides the option to process both traditional thermal films or pressure sensitive films. In addition, the patented curl management system places the film on the paper in a relaxed manner for a flat, finished product. Finally, the swing out supply mandrel is equipped with sideways adjustment and centering marks, allowing for easier and quicker loading with less down time.

## Separator

The separator offers complete sheet separation without bursting. Physically separating the sheet instead of bursting is beneficial when running polyester, nylon and films thicker than 1.3 mil, as it assures that there won't be frayed edges on the sheets. This makes it easier to register and stack the sheets for post-lamination processing.