


The Accu III - 2760 Cutter is available as a stand-alone unit or as part of a complete D&K laminating system. This cutter is also easily integrated into many other one sided laminating and finishing systems. A lap switch (thickness detector) senses sheet underlaps and activates a flying knife blade system that cleanly separates prints without frayed edges. Installation is simple and doesn't require any tie-ins such as nuts, bolts, clamps, etc.



System 2760 With Inline Accu III Cutter

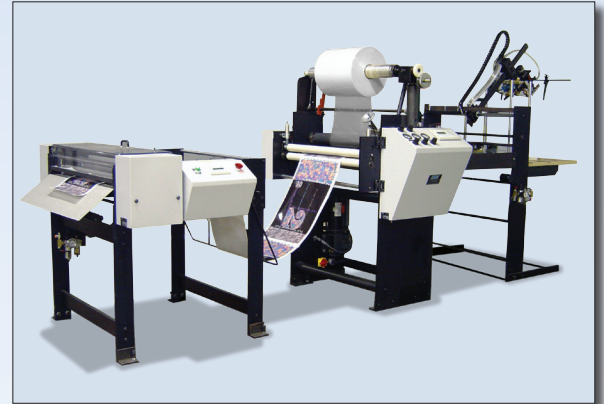

Technical Specifications

Dimensions:	50" W x 46" L x 39" H
Electrical:	115 VAC - 2 Wire Service + Ground 60 HZ; Single Phase 15 A
Air:	2 - 3 CFM @ 80 PSI with Storage Tank; 1/2 - 1 HP
Shipping Weight:	282 lbs.
Speed:	Up to 60 fpm
Min. Sheet Size:	8 1/2" x 11"
Max. Sheet Size:	26" x 30"
Min. Sheet Thickness:	70 lb. Text
Max. Sheet Thickness:	24 lb. Board



Made in the USA

The above information is presented for reference and illustration of general product characteristics only. The information does not constitute a representation or warranty relating to the suitability or fitness for a particular application or otherwise create guarantees of product performance. All material should be tested by purchaser to determine final suitability.